


User Manual


VGA+ Audio TO HDMI Converter

Mode No: AA6032

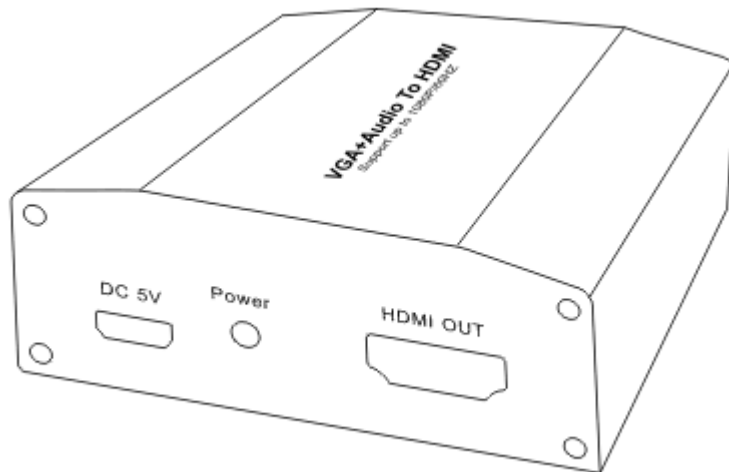


INTRODUCITON


Picture 1.0 front panel showing

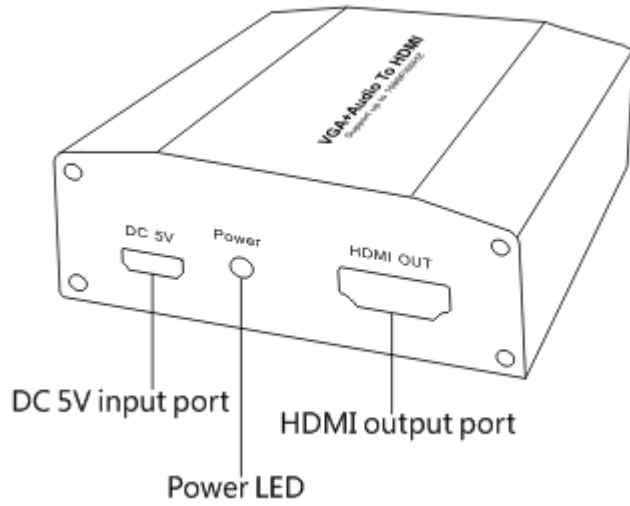

Picture 1.1 rear panel showing

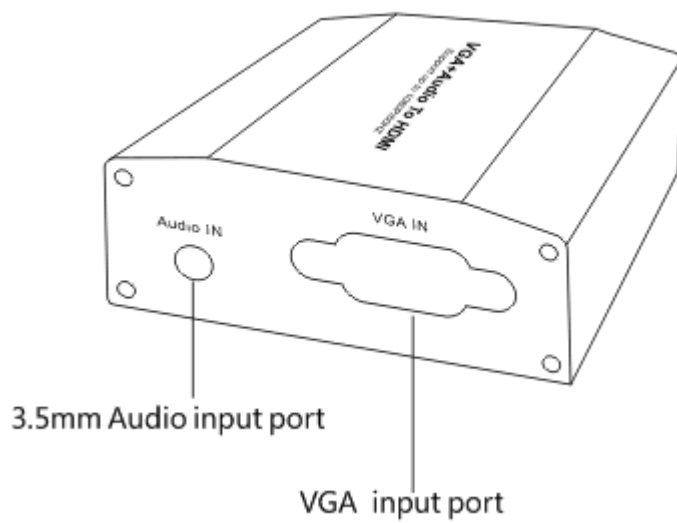

Connection and operation:

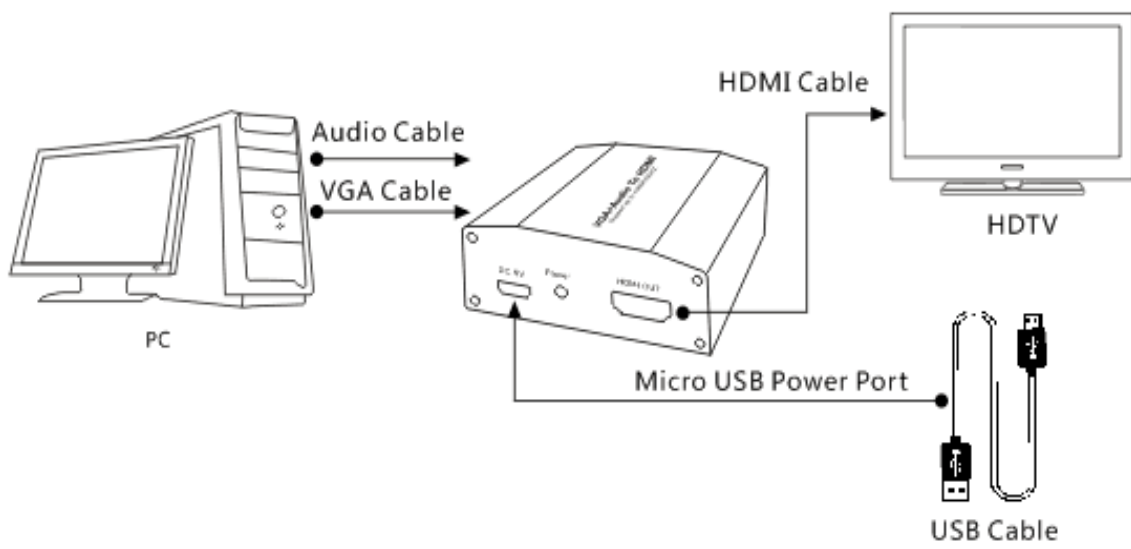

*Connect according to the connection method in the above figure, source → audio input → display device → power

Spec:

Mode No	AA6032
Mode name	VGA+ Audio TO HDMI Converter
Input channel	VGA port x1、3.5 Headphone port x1
Output channel	HDMI port x1
Analog audio Input	3.5mm headphone audio
VGA Resolution	800x600@60HZ,800x600@75HZ,1024x768@60HZ,1024x768@75HZ,1152*864@60HZ,1152x864@75HZ,1280*720@60HZ,1280x768@60HZ,1280x800@60HZ,1280x1024@60HZ,1280x1024@75HZ,1360x768@60HZ,1366x768@60HZ,1440x900@60HZ,1600x1200@60HZ,1680x1050@60HZ,1920x1080@60HZ
HDMI output resolution	Supports up to 1080P/60Hz
Analog audio input amplitude	1V RMS
Max refresh rate	75HZ
VGA Input cable length	VGA standard cable ≤8m
HDMI Output cable length	1080P/AWG26 ≤8m
Power supply	DC 5V/1A
Max working current	350mA
Working temperature range	0 ~ +40°C

Working humidity range	5 to 85%RH (No Condensation)
Storage temperature	-15 to 55°C
Storage humidity	5 ~95%RH(No Condensation)
Size	64X64X25.5 (mm)
Weight	82g
Accessories	Manua lx1, Micro USB cablex1 , Audio cablex1