

1×2 HDMI Splitter

User Manual

VER 2.0

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Table of Contents

1. Introduction.....	1
2. Features.....	1
3. Package Contents.....	1
4. Specifications.....	2
5. Operation Controls and Functions.....	3
6. Application Example.....	4

1. Introduction

1x2 HDMI Splitter is an advanced solution for splitting a HDMI content to 2 HDMI outputs synchronously. It provides high performance audio and video up to 1080P.

2. Features

- ☆ HDCP 1.4 compliant
- ☆ Up to 1080P with 24bit RGB/YCBCR 4:4:4
- ☆ VESA format up to QSXGA@60Hz
- ☆ Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
- ☆ Built-in equalizer, retiming and driver
- ☆ Smart EDID, STD(1080p) mode and TV(copy OUT1) mode
- ☆ Compact design for an easy and flexible installation


3. Package Contents

- ① 1× 1x2 HDMI Splitter
- ② 1× 5V/1A Power Adapter
- ③ 1× User Manual

4. Specifications

Technical	
Input Port	1×HDMI Type A (19-pin female)
Output Ports	2×HDMI Type A (19-pin female)
Video Resolution	1080P
ESD Protection	Human body model—±8kV (Air-gap discharge) &±4kV (Contact discharge)
Mechanical	
Chassis Material	Metal
Silkscreen Color	Black
Power Consumption	2W
Weight	165g
Power Supply	Input: AC100 - 240V 50/60Hz, Output: DC 5V/1A (US/EU standards, CE/FCC/UL certified)
Dimensions	56 mm(W)×100 mm(D)×16mm(H)
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)


5. Operation Controls and Functions

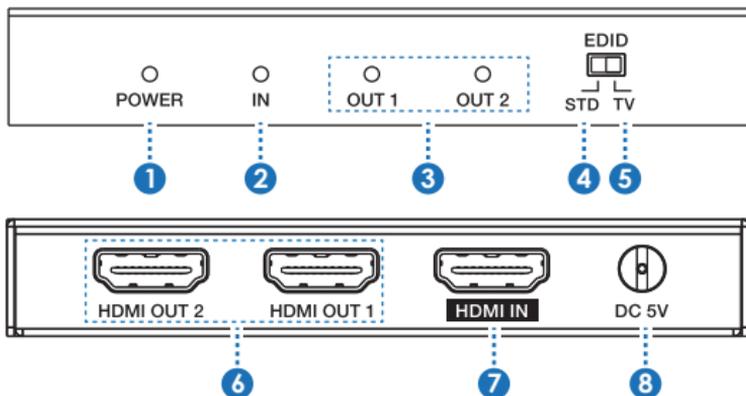

Number	Name	Function description
1	Power LED	This blue LED illuminate when the device is connected with power supply.
2	IN LED	This blue LED illuminate when the Source connected to the device.
3	OUT LED	These blue LEDs will light up to indicate which HDMI outputs are connected to an active TV/ display/monitor.
4	EDID STD	When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo.
5	EDID TV	When in 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1.
6	HDMI OUT 1~2	Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another splitter to extend the operating distance.

7	HDMI IN	Connect the input port to the HDMI output of your source device such as a DVD player or set-top box with an HDMI cable.
8	DC 5V	Plug the 5V DC power supply into the unit and connected the adaptor to an AC outlet.

6. Application Example

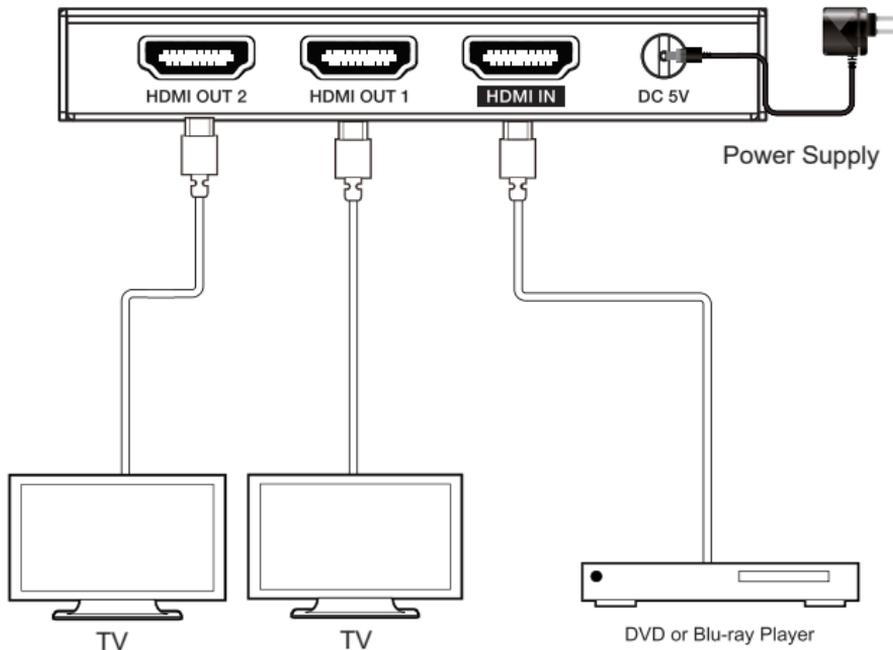

HDMI™
High-Definition Multimedia Interface

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.