

U S E R M A N U A L

HDMI Splitter 1x8

Model No: AA6026

Enjoy the vivid world!

INTRODUCTION

Dear customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Our series of HDMI Converters, switchers, extenders, matrixes and splitters are designed to make your A/V device use more convenient, more comfortable, more productive and more cost-efficient.

The 1x8 HDMI Splitter that supports Full HD 3D&4K*2K uses a single HDMI source, accessing to multiple HDMI sinks. The Splitter allows one HDMI devices to be split easily to eight HDMI compatible monitors or projectors. The Splitter can also be placed at the end of a long HDMI cable to regenerate the HDMI signal.

Our devices offer solutions for noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.


FEATURES

- One HDMI 1.4a input signal split to eight HDMI 1.4a sink devices
- Support Full HD, Full 3D
- Support 4K*2K resolution
- Support CEC
- Support deep color 30bit, 36bit, 48bit
- Support Blue-Ray 24/50/60fs/HD-DVD/xvYCC
- Digital audio format, as DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3
/DSD/HD (HBR)
- Support signal retiming
- Support input up to 12metres AWG26 HDMI standard cable length,
output up to 12metres AWG26 cable length
- No loss of quality
- Installs in minutes
- Need DC5V/3A power supply

The accessories with the machines lists as picture:

- 1、 5V Power Adapter
- 2、 one pc of Manual

Power Adapter

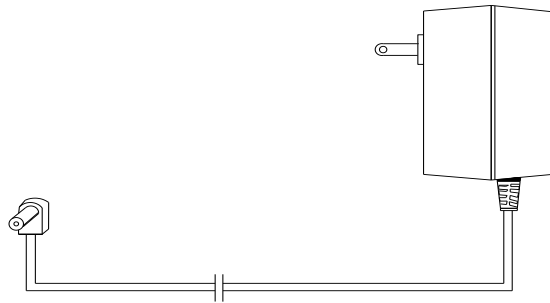

Physical Connection Showing Picture:

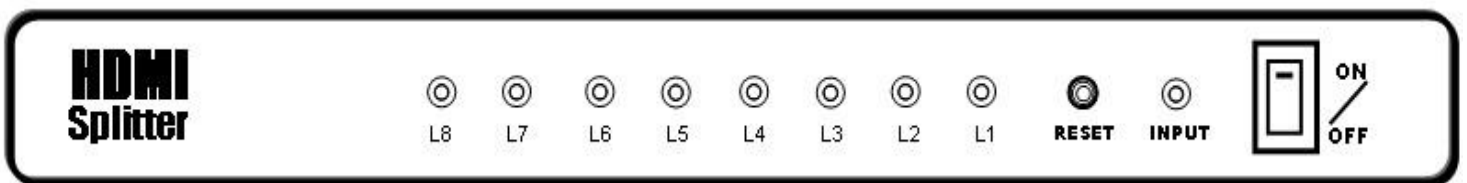


Figure 1.0 Front Panel Showing Picture

L1-L8: HDMI output led status light

RESET : Reset Button

Input: HDMI input led status light

ON/OFF: On Is Turn On The Device,Off Is Turn Off On The Device

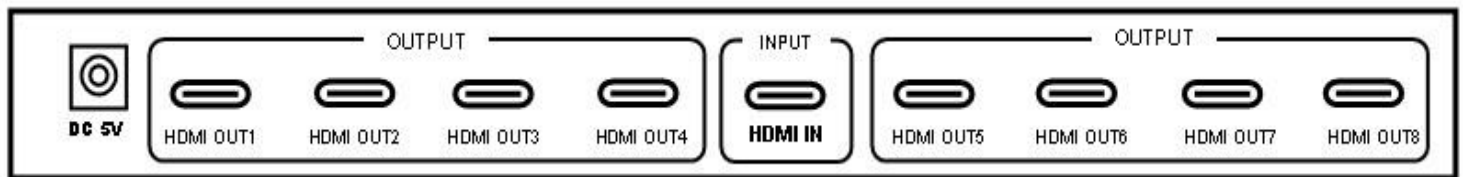


Figure 1.1 rear panel showing picture

DC 5V: 5V DC-DC power interface

HDMI OUT1- HDMI OUT8: HDMI output interface

HDMI IN: HDMI input interface

Operating and Connecting:

- 1. Connect one cable from HDMI source devices into HDMI Splitter input.

2. Connect one cable from each display (monitor or projector) into the HDMI Splitter outputs.
3. Connect 5V power supply to the HDMI 1x8 Splitter.

SPECIFICATIONS:

HDMI resolution	24/50/60fs/1080p/1080i/720p/576p/576i/480p/480i
Support video color format	24bit/deep color 30bit,36bit, 48bit
Support audio format.....	DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3/DSD HD(HBR)
Max bandwidth.....	340MHz
Max baud rate.....	10.2Gbps
Input/Output TMDS signal	0.5~1.5Volts p-p(TTL)
Input/Output DDC signal	5Volts p-p (TTL)
Input cable distance.....	≤12m HDMI AWG26
Output cable distance.....	≤12m AWG26 HDMI standard cable
Max working current.....	3A
Power adapter format..Input:	AC (50HZ, 60HZ) 100V-240V; Output: DC5V/3A
Operating Temperature range.....	(-15 to +55°C)
Operating Humidity range.....	5 to 90%RH (No Condensation)
Dimension (L x W x H)	280X138X25(mm)
Weight.....	871g

Notes:

Pls use the machine as the instruction listed to keep the long use lifetime of the machine.

1. The machine should be placed at the spot far from the Damp, High-Temperature, Dusty, Erosive, and oxidative environment.
2. All parts will be free from the strong shake, hit, fall.
3. Touching the power adaptor with the wet hands is prohibited.
4. Pls hold the power adaptor head and do not pull the power cord when cut off from the socket.
5. Pls turn the power off when the machine is not used for long time.
6. Pls do not open the cover and do not touch the inside parts.
7. Pls use the original factory power adaptor.

Before power on, pls check the connection line carefully. And make sure that all interfaces are normally connected. The common trouble shooting way shows below:

Serial NO	Trouble Description	Cause and Ways to deal with
1	Non-Power-Connected	1、 Check if the power adaptor head is truly and correctly inserted the power socket. 2、 Check the power switch if it is in on status.
2	No Picture	1、 Pls to make sure that the TV is on and has been connected with the machine. 2、 To check if the signal source is on and well connected. 3、 Check the system connection quality. 4、 Check if the line is all good quality. 5、 Check the cable quality
3	Obscure Picture	1、 To try again to connect the cable to be free from the unsuccessful connection. 2、 HDMI Cable Quality