


TA0632 Installation Manual

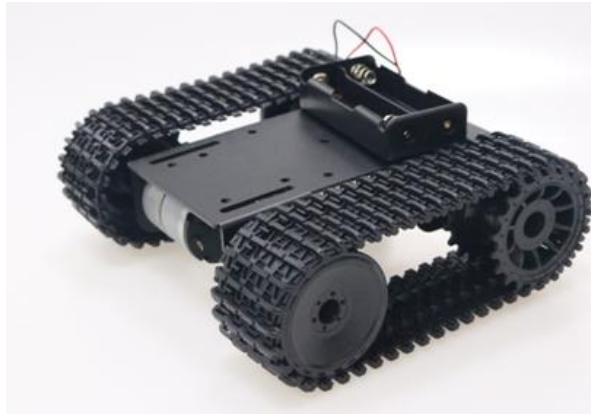

Package Contents:

Name	QTY	Name	QTY
Chassis	1	M4*50 hexagon screws	2
Motor	2	M3*8 hexagon screws	2
Track	2	M3*5 screws	8
wheel assembly	2	M4 nut	4
Driving wheel	2	washer	4
18650 battery box	1	Motor shaft spacer	2
Connector	2	Black M3 Grub screws	2


Note: This kit does come with some spare parts and may require tools not included.

Installation Steps:

Step 1. Put together the wheel assembly. (Install the M4*50 screws into the wheel)



Step 2. Lock the wheel assembly with an M4 nut.

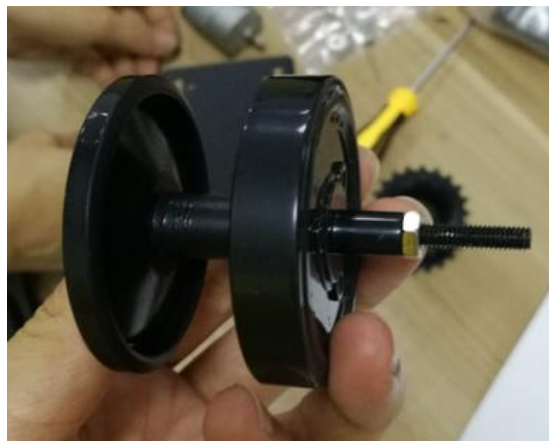

Step 3. Place the washer onto the large hole of the chassis, then install the wheel into the chassis.



Step 4. Install the washer on the opposite side on the chassis, then secure an M4 nut.

Please note not to tighten the nut too much on the wheel so that it can provide movement .



Step 5. Install the motor in between the chassis, using the 3pcs of the M3*6mm flathead screws.



Step 6. Installing the driving wheel:



Step 7. Firstly connect the driving wheels together, be sure to align the correct points on the two wheels. Then use the Allen Key to install and tighten the M3*8 hexagon screws into the center of the wheel to lock it into place.



Step 8. Install the Motor Shaft spacer onto the motor.



Step 9. Secure the motor shaft spacer by installing the black grub screw into the provided hole, be sure to align the screw with the flat side of the motor shaft and then tighten with the smallest Allen Key.



Step 10. To install the tank track first use a paper clip to remove the pin from the tank track.



Step 11. Measure the required track length around the driving wheel and the back wheel.



Step 12. Load the track pin back into the track connections using a pair of pliers.



Repeat: Now that you have successfully install one side of the tank tracks, you can repeat steps 1 to 12 to install the wheels and tracks on the other side.

