TR3850 – Folding GPS Drone Quick Start Guide

Quick start guide for
the TR3850 folding
GPS Drone

Turn on
remote control
switch to ON

Power the drone
on by pressing
switch for 3 seconds

1

2

Once powered, drone will
automatically pair with remote.
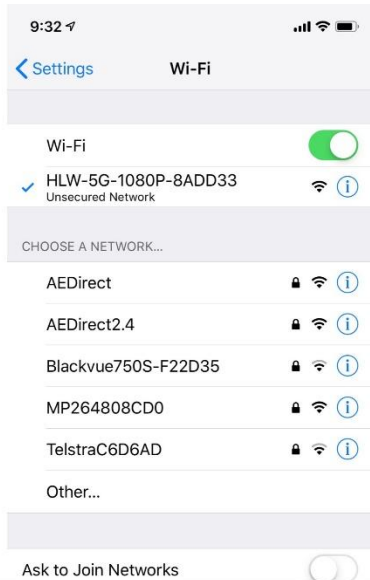
3

Place on level surface
to commence calibration

4

Compass calibration -
place & hold left
joystick to
bottom left hand corner
& right joystick
to bottom right hand
corner simultaneously

5

6 Rotate Vertically with camera pointing up. 3 full rotations.

7. Rotate Horizontally. 3 full rotations.

‹ Settings　　Wi-Fi

Wi-Fi

✓ HLW-5G-1080P-8ADD33
Unsecured Network

CHOOSE A NETWORK...

AEDirect

AEDirect2.4

Blackvue750S-F22D35

MP264808CD0

TelstraC6D6AD

Other...

Ask to Join Networks

Known networks will be joined automatically. If no known

Connect to the drones wi-fi signal on your smartphone -HLW-5G

8
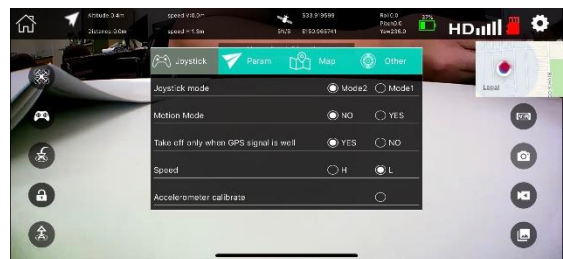
HELIWAY

VIDEO　　START　　HELP

Open the Heliway GS APP

9

APP DEFAULT SETTINGS IS SET
TO ONLY
FLY ON STRONG GPS SIGNAL
(MIN 9 SATELLITES).
ENSURE TO USE
OUTDOORS TO ACHIEVE THIS.

10

To take off without
waiting for strong
GPS signal -
go to settings
and change Take
off on Good GPS
signal to NO

11

Unlock the drone ready
for flight - place
& hold left hand
joystick to bottom peft
hand corner & right
hand joystick to bottom
right hand corner simultaneously